
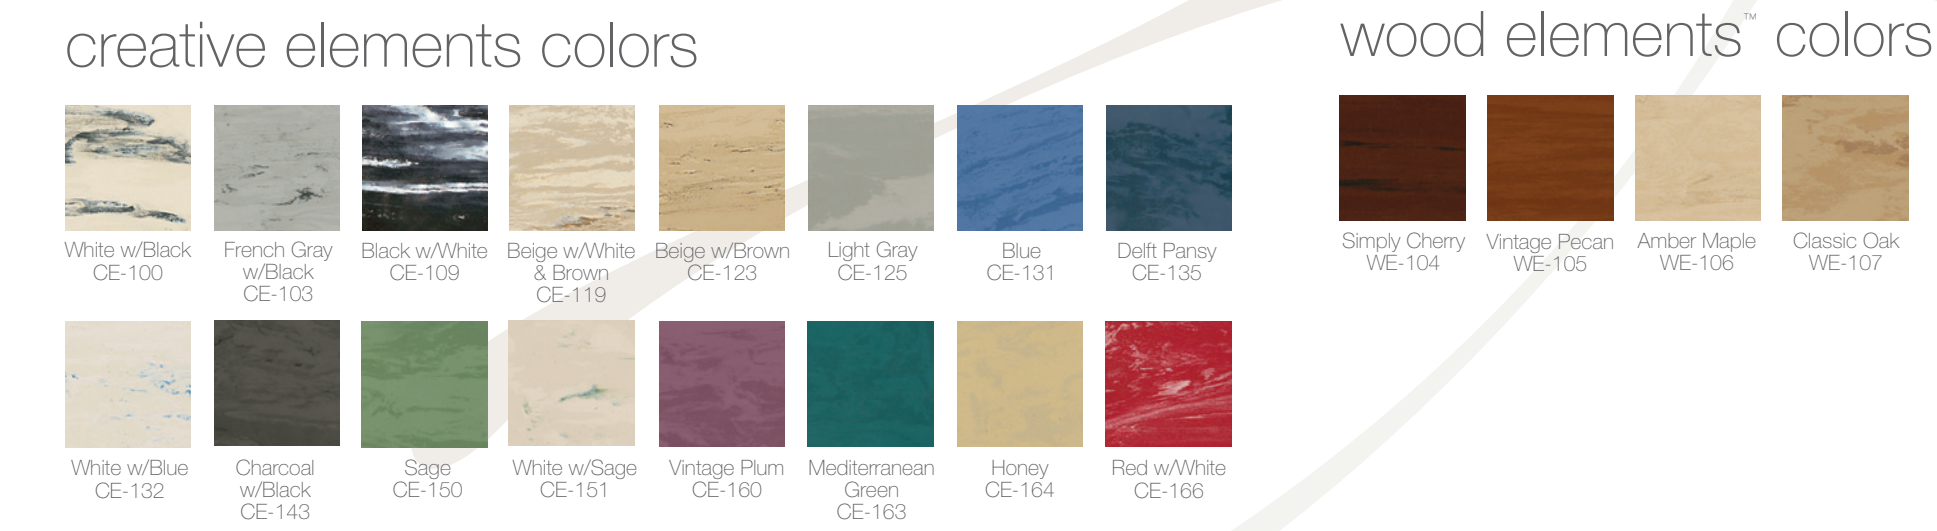
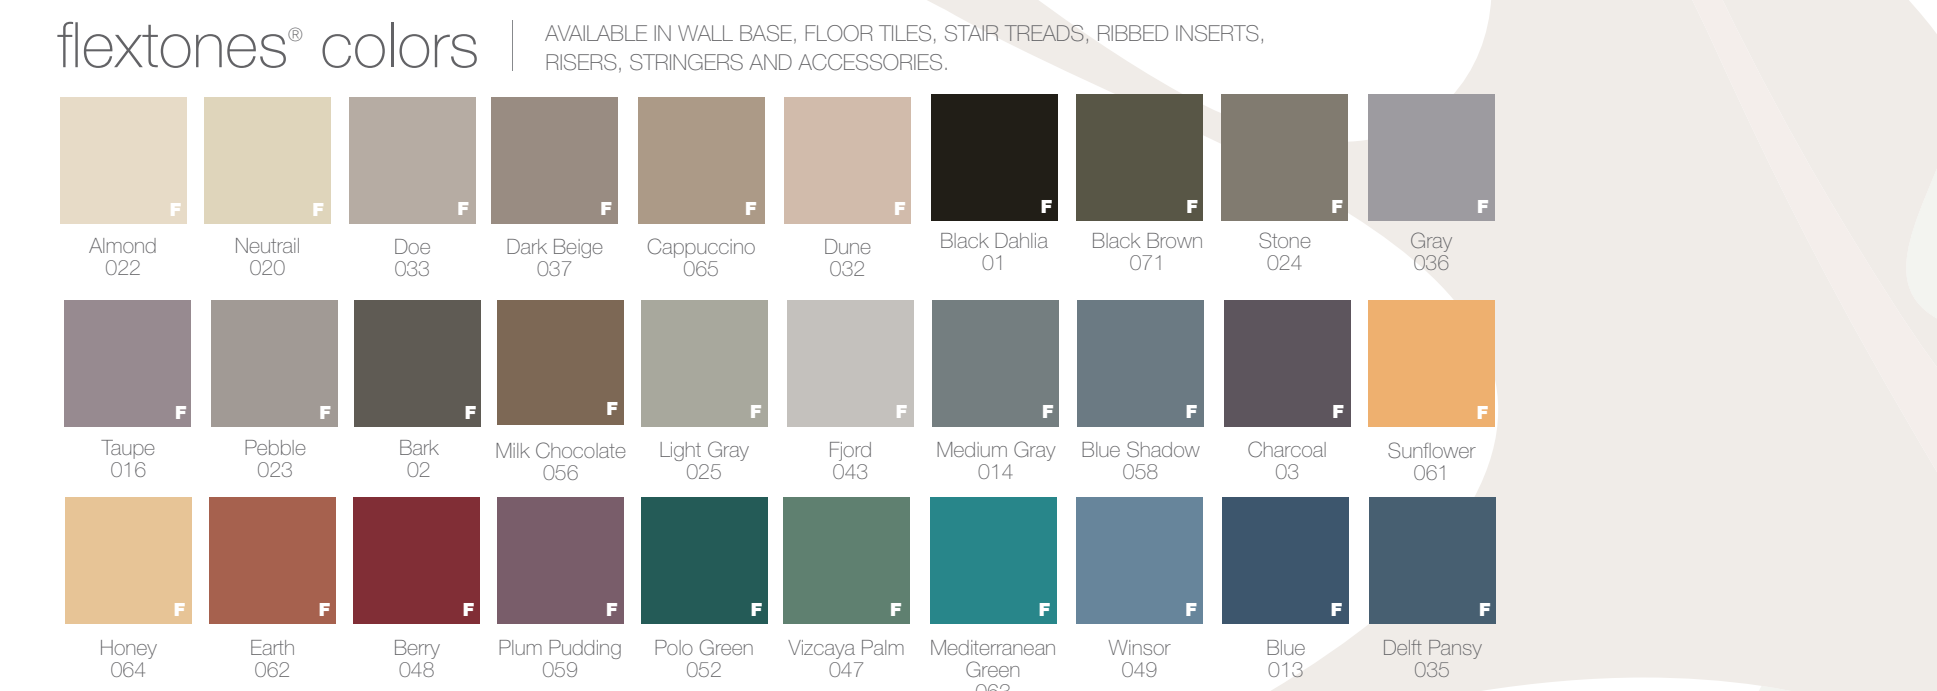
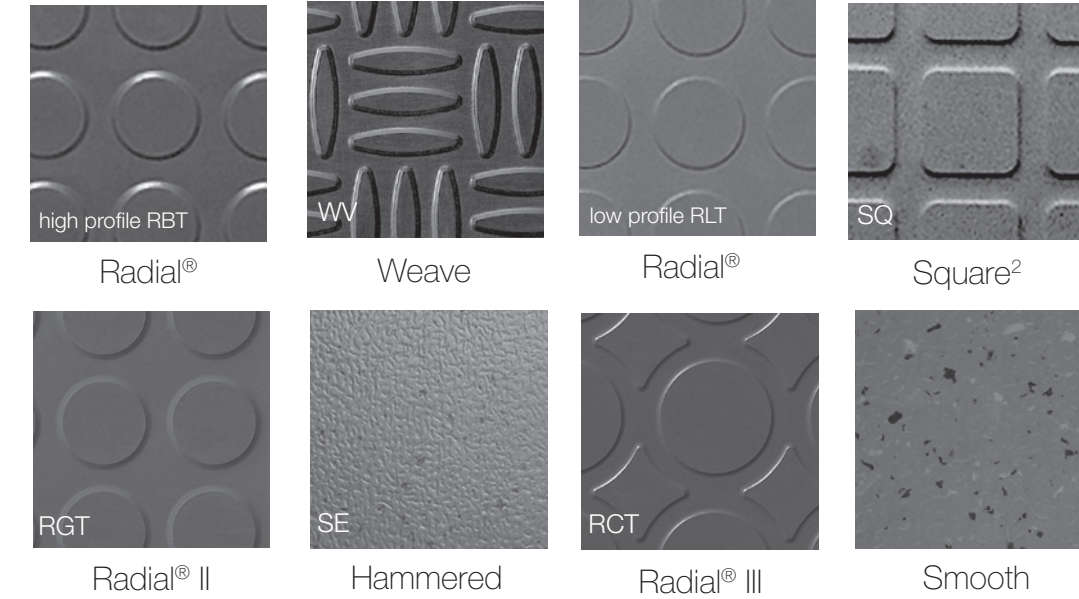
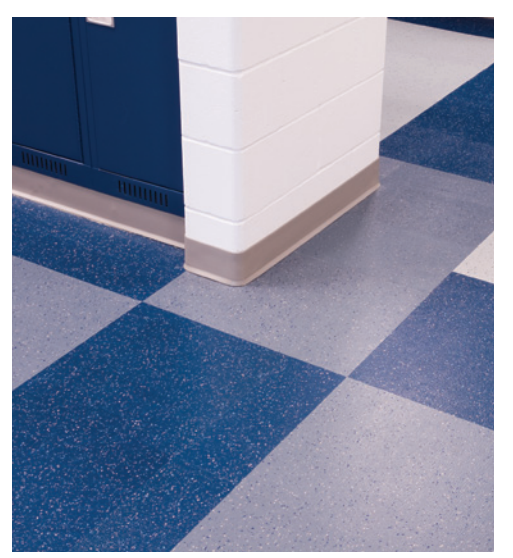
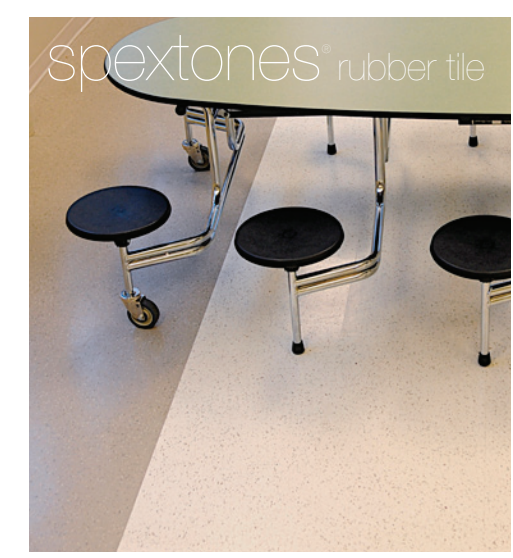


distinct designs rubber tile & tread

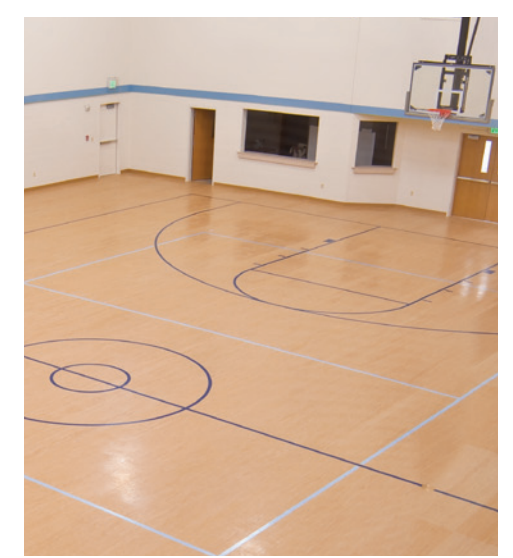

Heavy Duty Smooth
Order Prefix 120, 130 & 170

Gauge 3/16" at nose
Depth 12-1/4"
Lengths 36", 42", 48", 54", 60", 72"
Nose Square
Pieces /Ctn 10
Weight /Lin Ft (lb) 1.5
Matching Profile Smooth Tile or Sheet and Diamond Landing
Grit strips for 130 in black only.

120
130 Safety Rib two 3/4" strips
170 Visually Impaired Contrast, 2" strip

Extra Heavy Duty Diamond
Order Prefix 600 & 675

Gauge 5/16" at nose
Depth 12"
Lengths 36", 42", 48", 54", 60", 72"
Nose Square
Pieces /Ctn 6
Weight /Lin Ft (lb) 600 2.8, 675 2.4
Matching Profile Smooth Tile or Sheet and Diamond Landing
Exclusive metal-reinforced nose included.

600
675 Textured/Visually Impaired Contrast, 2" strip

Heavy Duty Extended Radial II
Order Prefix 701E & 776E

Gauge 1/4" at nose
Depth 15"
Lengths 36", 42", 48", 54", 60", 72"
Nose Square, adjustable to 60"
Pieces /Ctn 6
Weight /Lin Ft (lb) 2
Matching Profile Radial II (RGT)

701E
776E Visually Impaired Contrast

stair tread accessories

Rubber risers, stringers, landing tiles, assurance detectable warning tile (ADWT) and other accessories make up the common denominators for use with FLEXCO® rubber stair treads.

> Coordinating colors match rubber floor tiles, including Radial®, Radial® II, Radial® III, Weave and Square® textures, Evolving Styles®, and Spextones®

> Diamond pattern landing tiles are available in Evolving Styles®, Spextones® and FlexTones® colors to match our stair treads.

Diamond Landing Tile Order Prefix DSA

Gauge 3/16"
Size 27" x 27"
Pieces /Ctn 6
Weight /Ctn (lb) 40.2
Sq Ft /Ctn 30.37
Available in Spextones®, FlexTones®, and Evolving Styles color palette.

Stringer Material Order Prefix STR*

Gauge 0.060"
Size 10" x 72"
Pieces /Ctn 10
Weight /Lin Ft (lb) 0.65

Riser Order Prefix RSR**

Gauge 1/8" milled
Height 7"
Lengths 36", 42", 48", 54", 60", 72", 84", 96", 108"
Pieces /Ctn 24
Weight /Lin Ft (lb) 0.75
*Riser color list will be packaged to open carton.

* Use prefix SSTR for Spextones® colors. ** Use prefix RSR for Spextones® colors.
> Rubber stringers and risers available in FlexTones®, Spextones®, and Evolving Styles® colors.

Extra Heavy Duty Radial
Order Prefix 500 & 575

Gauge 5/16" at nose
Depth 12"
Lengths 36", 42", 48", 54", 60", 72"
Nose Square
Pieces /Ctn 6
Weight /Lin Ft (lb) 2.8
Matching Profile Radial high profile (RBT)
Exclusive metal-reinforced nose included.

500
575 Visually Impaired Contrast, 2" strip

Heavy Duty Diamond
Order Prefix 650 and 685

Gauge Square 1/4" at nose and round 7/64" at nose.
Depth 12"
Lengths 36", 42", 48", 54", 60", 72", 84", 96", 108"
Nose Round Nose only up to 72" in length
Square and Round
Pieces /Ctn 6 (72" or less), 4 (84" and up)
Weight /Lin Ft (lb) 2.25
Matching Profile Smooth Tile or Sheet and Diamond Landing

650 Square
685 Textured, 2" strip
650 Round

Heavy Duty Square
Order Prefix 800 & 875

Gauge 1/4" at nose
Depth 12-1/4"
Lengths 36", 42", 48", 54", 60", 72"
Nose Square
Pieces /Ctn 6 (72" or less)
Weight /Lin Ft (lb) 2.8
Matching Profile Square® (SQ)
Exclusive metal-reinforced nose included.

800
875 Visually Impaired Contrast, 2" strip

warning tile

Assurance detectable warning tile features deeply set, pre-grooved strips which can be "felt" through a cane or walking device to alert the visually impaired of approaching stairways. May contribute to LEED® credits MR 5 and MR 6.

> Meets ANSI A117.1/705.3.3 for detectable warnings on walking surfaces.

Assurance Detectable Warning Tile Order Prefix ADWT

Gauge 1/8"
Size 12" x 12", 12" x 30", 30" x 30"
Weight /Ctn (lb) 45, 60, 90
Sq Ft /Ctn 45, 54, 60

features and benefits

- > Available to meet ADA requirements for contrasting color.
- > Yellow striping meets OSHA safety standards.
- > Glow-in-the-Dark luminescent safety strips meet DIN 675.10.
- > Meets California state standard code Title 24, Section 2-3306 (F).

Heavy Duty Radial
Order Prefix 550 & 585

Gauge 3/16" at nose
Depth 12"
Lengths 36", 42", 48", 54", 60", 72", 84", 96", 108"
Nose Square, adjustable to 60"
Pieces /Ctn 6 (72" or less), 4 (84" and up)
Weight /Lin Ft (lb) 2.4
Matching Profile Radial high profile (RBT)

550
585 Visually Impaired Contrast, 2" strip

Heavy Duty Radial II
Order Prefix 701 & 776

Gauge 3/16" at nose
Depth 12"
Lengths 36", 42", 48", 54", 60", 72", 84", 96", 108"
Nose Square, adjustable to 60"
Pieces /Ctn 6 (72" or less), 4 (84" and up)
Weight /Lin Ft (lb) 2
Matching Profile Radial II (RGT)

701
776 Visually Impaired Contrast, 2" strip

Heavy Duty Radial II One-Piece Tread with Riser
Order Prefix 1701 & 1776

Gauge 1/4" at nose
Depth 20-1/2"
Lengths 36", 42", 48", 54", 60", 72", 84", 96", 108"
Nose Square, adjustable to 60"
Pieces /Ctn 6 (48" or less), 4 (54" and up)
Weight /Lin Ft (lb) 2.5
Matching Profile Radial II (RGT)

1701
1776 Visually Impaired Contrast, 2" strip

abrasive strips

Rubber and vinyl stair treads with abrasive grit strips are available in Glow-in-the-Dark and other colors to meet OSHA, ADA, CA Title 24 and DIN requirements. The 3/4" strips for the 130 treads are available in black only and the 2" strips are available in all colors listed below.

features and benefits

- > Available to meet ADA requirements for contrasting color.
- > Yellow striping meets OSHA safety standards.
- > Glow-in-the-Dark luminescent safety strips meet DIN 675.10.
- > Meets California state standard code Title 24, Section 2-3306 (F).

abrasive grit strip colors

Yellow, Black, Brown, Glow-in-the-Dark, White

Color selections must be made from actual samples.

smooth and ribbed rubber inserts

FLEXCO® stair treads with smooth and ribbed inserts provide a tactile surface that's durable and easy to clean. In addition, the low-profile 2" strips are available in FlexTones® colors and 075 Canary for easy coordination with our wall base, tiles, risers, stringers and accessories.

features and benefits

- > Available in FlexTones® colors plus Canary Yellow.
- > Ideal for vinyl treads as well as all rubber tread in profiles.
- > Available to meet ADA requirements for contrasting color.
- > Canary smooth and ribbed inserts meet OSHA safety standards.
- > Meets California state standard code Title 24, Section 2-3306 (F).

new!
photoluminescent inserts

FLEXCO®'s photoluminescent inserts reduce slips and falls with recycled light and provide superior step-edge visibility.

Lights on: See steps clearly because of the contrasting colors of the non-slip material and the photoluminescent pigment.

Lights off or dimmed: Photoluminescent strips provide instant illumination during events or backouts and will glow clearly and brightly with visibility for over 10 hours in total darkness.

spextones colors

warning tile colors

ribbed rubber insert strip colors

distinct designs rubber tile

FLEXCO TOP

- > PVC free rubber tile and sheet
- > Natural resistance to bacteria and fungi in accordance with ASTM G 21
- > Homogeneous color; Spextones colors conceal dirt and subsurface irregularities
- > Quiet and extremely comfortable walking surface reduces leg fatigue and noise
- > Low maintenance, no waxing required

ecoScorecard

Your guide to FLEXCO® products and LEED® certifications. For more information, visit www.flexcofloors.com

All products made in the U.S.A.

FLEXCO®

innovative design. flooring performance.

1.800.633.3151 • www.flexcofloors.com