







FLOORLEUM PLAIN TOLI FLOORLEUM is the 30 years long-established vinyl sheet for multipurpose.

Specification	overall thickness	2.0mm / 2.5mm	width x length	1820mm x 9m
JIS Registered No.	No. GB0506143 / No. GB0610001 (JIS A 5705 Vinyl Sheet Flooring)			
Packing	9m/roll			
Net Weight	(2.0mm) 56.0kg/roll, (2.5mm) 73.0kg/roll			
Performance	Wear Resistance	(EN649) Group T		
Recommended Adhesive from TOLI	dried mortar and concrete	Eco Royal Cement, Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
	TOLI UNDERLAY SHEET	US Cement, US Cement (less-smelly), US200		
Welding	Welding rod for heat-welding is available on a color-by-color basis.			
Notes on Installation	+Seams should be heat-welded. +When you install 2 different sheets, each edge should be jointed at the seam. (Do not cut in the middle of the sheet.) +For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. +As the sub-floor material, the underlayment like TOLI UNDERLAY SHEET (page 278) is also workable. Apply the same adhesive for both upside and downside of the underlayment.			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Custom Order	Antibacterial spec. (ANTIBACTERIAL FLOORLEUM PLAIN) and non-slip spec. (FLOORLEUM PLAIN EMBOSS) are also available. Please see the page 308 & 334.			
Others	<ul> <li>◆The dirt and stains will be more visible on the floor covering with lighter plain colors, compared to dark colors. Also they are more likely to stick with the deep-embossed surface than the flat surface.</li> <li>◆Please be aware that some rubber casters might cause color-contamination.</li> <li>◆Please note that the product has the indigenous odor from its materials.</li> </ul>			

MADE IN JAPAN



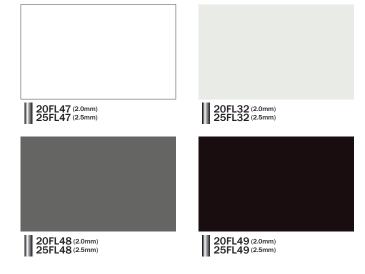











## **FLOORLEUM PLAIN**



category: vinyl sheet

