



RESONANCE <GX-9700V>


Authentic wood-plank image is well converted into carpet tile form.

category: carpet tile

Carpet

Composition	surface	BCF Nylon 100%	dyeing method of yarn	Solution Dyed	
	base fabric	Nonwoven Polyester	backing	PVC and Glass Fiber	
Specification	size	250mm x 1000mm	overall thickness	7.5mm	
	pile height	H 4.0mm / L 3.0mm (textured loop pile)			
	gauge	1/12	stitch	11.5	yarn weight (oz/sq.yd)
Packing	12pcs/box = 3m ² /box				
Net Weight	16.5kg/box				
Performance	Critical Radiant Flux	(ASTM E648)	Class 1 Average CRF 0.45/cm ² or higher		
	Smoke Density (flaming)	(ASTM E662)	Less than 450		
	Flame-retardant	Fire Defense Law in Japan Authorized No.E2120040			
	Antistatic	Less than 1.0kv (JIS L 1021-16, at 23 degrees centigrade, 25%RH)			
	Stain-resistant	Stain Release			
	Formaldehyde Radiation	F☆☆☆☆ Interior-fabrics Performance Evaluation Conference Certified No.J12-30822			
Way of Installation	Monolithic or Ashlar				
Recommended Adhesive from TOLI	TOLI ECO GA Cement (required quantity)	for steel or plastic sub-floor	40 to 60 gram/m ²		
		for mortar and wood sub-floor	60 to 100 gram/m ²		
Notes on Installation	◆Apply the adhesive on the whole surface of the sub-floor thinly and evenly. After drying, when the adhesive becomes translucent, install the tiles. Be careful not to put the tiles too tightly. ◆When you install RESONANCE on the free access floor, each tile should be laid to stride over the joint of free access floor panels in the middle. (The joint of RESONANCE should not be matched to that of free access floor panels.)				
Others	◆After installation, in case you do not feel comfortable with the joints, please change the tiles partly so that it will look natural. ◆Please note that the product has the indigenous odor from its materials.				

MADE IN JAPAN

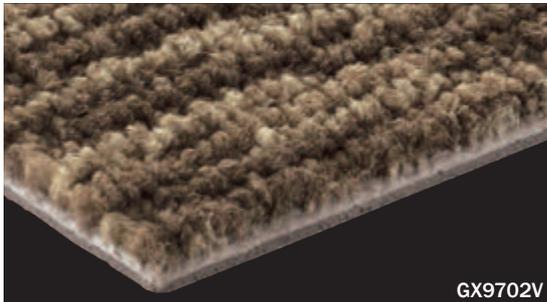

GX9702V



|| GX9701V



|| GX9702V



|| GX9703V



▲ GX9702V