



GOOD DESIGN



LAYPLANCHER <GX-9550V>

category: carpet tile

Elaborate woven texture is superbly expressed by different piece-dyed yarns and shiny yarns. Its unique natural color tones are inspired by mineral pigments for Japanese traditional paintings.

Carpet Tile

Composition	surface	BCF Nylon 100%	dyeing method of yarn	Piece Dyed	
	base fabric	Nonwoven Polyester	backing	PVC and Glass Fiber	
Specification	size	250mm×1000mm	overall thickness	7.3mm	
	pile height	H 4.5mm / L 3.0mm (textured loop pile)			
	gauge	1/10	stitch	11.5	yarn weight (oz/sq.yd)

Packing	12pcs/box = 3m ² /box			
Net Weight	16.5kg/box			

Performance	Critical Radiant Flux	(ASTM E648)	Class 1 Average CRF 0.45/cm ² or higher	
	Smoke Density	(ASTM E662)	Less than 450	
	Flame-retardant	Fire Defense Law in Japan Authorized No.E2180255		
	Antistatic	Less than 1.0kv (JIS L 1021-16, at 23 degrees centigrade, 25%RH)		
	Stain-resistant	Stain Release		
	Formaldehyde Radiation	F ¹⁵ ☆☆☆☆ Interior-fabrics Performance Evaluation Conference Certified No. J18-21149		

Way of Installation	 Ashlar or  Monolithic			
---------------------	---	--	--	--

Recommended Adhesive from TOLI	TOLI ECO GA Cement (required quantity)	for steel or plastic sub-floor	40 to 60 gram/m ²
		for mortar and wood sub-floor	60 to 100 gram/m ²

Notes on Installation

- ◆Apply the adhesive on the whole surface of the sub-floor thinly and evenly. After drying, when the adhesive becomes translucent, install the tiles. Be careful not to put the tiles too tightly.
- ◆When you install LAYPLANCHER on the free access floor, each tile should be laid to stride over the joint of free access floor panels in the middle. (The joint of LAYPLANCHER should not be matched to that of free access floor panels.)

Others

- ◆The color shading differs on a tile-by-tile basis. In case you do not feel comfortable about the floor after installation, please change the tiles partly so that it will look natural.
- ◆Please note that the product has the indigenous odor from its materials.

MADE IN JAPAN



|| GX9554V



GX9551V



|| GX9555V



|| GX9551V




|| GX9556V



|| GX9552V



|| GX9557V

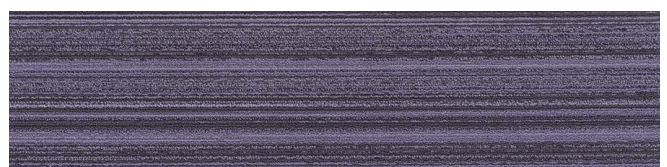

|| GX9553V