



LONG LIFE  
DESIGN



# GA-100T (SPEAR LINE)

category: carpet tile

Sterically-made sharp linear pattern.  
Characterized by fine expression of shiny  
yarns and dynamic image akin to KASURI.  
**GOOD DESIGN LONG LIFE DESIGN AWARD-  
winning product in 2015.**

Composition	surface		BCF Nylon 100%		dyeing method of yarn		Piece Dyed	
	base fabric		Nonwoven Polyester		backing		PVC and Glass Fiber	
Specification	size		500mm×500mm		overall thickness		7.5mm	
	pile height		H5.0mm/M4.0mm/L3.0mm (textured loop pile)					
	gauge		1/10	stitch		12.0	yarn weight (oz/sq.yd) 17.4	
Packing	20pcs/box = 5m <sup>2</sup> /box							
Net Weight	24.0kg/box							
Performance	Critical Radiant Flux		(ASTM E648)		Class 2 Average CRF 0.22/cm <sup>2</sup> or higher			
	Smoke Density		(ASTM E662)		Less than 450			
	Flame-retardant		Fire Defense Law in Japan Authorized No.E2170233					
	Antistatic		Less than 1.0kV (JIS L 1021-16, at 23 degrees centigrade, 25%RH)					
	Stain-resistant		Stain Release					
	Formaldehyde Radiation		F☆☆☆☆ Interior-fabrics Performance Evaluation Conference Certified No.J17-31266					
Way of Installation	<div><div><div>↑</div><div>↑</div><div>↑</div><div>↑</div></div>Monolithic</div> or <div><div><div>↑</div><div>→</div><div>→</div><div>↑</div></div>Quarter Turn</div>							
Recommended Adhesive from TOLI	TOLI ECO GA Cement		(required quantity)		for steel or plastic sub-floor		40 to 60 gram/m <sup>2</sup>	
					for mortar and wood sub-floor		60 to 100 gram/m <sup>2</sup>	
Notes on Installation	◆Apply the adhesive on the whole surface of the sub-floor thinly and evenly. After drying, when the adhesive becomes translucent, install the tiles. Be careful not to put the tiles too tightly.							
Others	◆The stripes differ in position on a tile-by-tile basis so that they will not be exactly connected between the tiles (please refer to the installation image). ◆In Monolithic installation, when the color difference between the tiles stands out or the joints are visible, please switch the tiles partly. ◆Please note that the product has the indigenous odor from its materials. ◆Right after installation, color shading could be seen on the floor. This is just because surface piles partially lie down. With the passage of time, it will disappear.							
Custom Order	All the standard colors of GA-100T can be made with Nano Clean finish (patent-obtained special stain release) on a made-to-order basis. For more information, please contact TOLI sales reps.							


MADE IN JAPAN




GA10332T



GA10332T

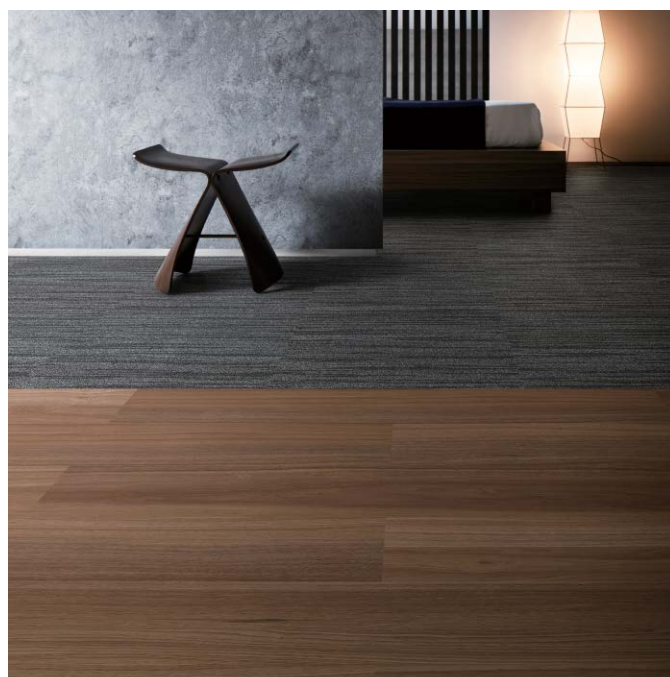

▲ GA10333T/TTN3128 (LL FREE 50 NW-EX · page 321)




GA10333T



GA10335T



GA10334T



GA10336T