



**LONG LIFE
DESIGN**




GA-100W (fog)

category: carpet tile

Unique subtle gradation in a fog image will match any kind of spaces.
GOOD DESIGN LONG LIFE DESIGN AWARD-winning product in 2015.

Composition	surface		BCF Nylon 100%		dyeing method of yarn		Piece Dyed					
	base fabric		Nonwoven Polyester		backing		PVC and Glass Fiber					
Specification	size		500mm x 500mm		overall thickness		7.0mm					
	pile height		H 4.0mm / L 2.5mm (textured loop pile)									
	gauge		1/10		stitch		11.5		yarn weight (oz/sq.yd)		17.1	
Packing		20pcs/box = 5m ² /box										
Net Weight		24.5kg/box										
Performance	Critical Radiant Flux		(ASTM E648)		Class 1 Average CRF 0.45/cm ² or higher							
	Smoke Density		(ASTM E662)		Less than 450							
	Flame-retardant		Fire Defense Law in Japan Authorized No.E2120244									
	Antistatic		Less than 1.0kv (JIS L 1021-16, at 23 degrees centigrade, 25%RH)									
	Stain-resistant		Stain Release									
	Formaldehyde Radiation		F☆☆☆☆ Interior-fabrics Performance Evaluation Conference Certified No.J12-30848									
Way of Installation		<div><div><div><div>↑</div><div>↑</div></div><div><div>↑</div><div>↑</div></div></div>Monolithic</div> or <div><div><div>↑</div><div>→</div></div><div><div>→</div><div>↑</div></div></div> Quarter Turn										
Recommended Adhesive from TOLI		TOLI ECO GA Cement		(required quantity)		for steel or plastic sub-floor				40 to 60 gram/m ²		
						for mortar and wood sub-floor				60 to 100 gram/m ²		
Notes on Installation		Apply the adhesive on the whole surface of the sub-floor thinly and evenly. After drying, when the adhesive becomes translucent, install the tiles. Be careful not to put the tiles too tightly.										
Others		◆The stripes differ in position on a tile-by-tile basis so that they will not be exactly connected between the tiles (please refer to the installation image). ◆To have a natural image after installation, stripes are intentionally inserted in the design at regular intervals, which is not a manufacturing defect. In case you do not feel comfortable about the floor after installation, please change the tiles partly so that it will look natural. ◆Please note that the product has the indigenous odor from its materials.										

MADE IN JAPAN

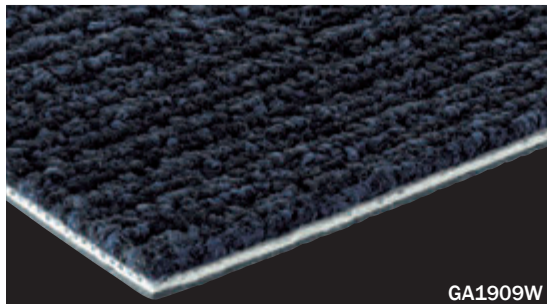

GA1909W



GA1907W



GA1901W



GA1902W



GA1903W




GA1909W



GA1904W



GA1905W



GA1906W



GA1908W



GA-100W (fog)

category: carpet tile



Carpet



▲ GA1904W