






# DC-1100

DC-1100 is a special carpet tile product with dust control function. It works as an entrance mat in 500mm x 500mm size, which can be installed together with other existing carpet tiles.

category: carpet tile

Composition	surface	BCF Nylon 100%	dyeing method of yarn	Solution Dyed (with Monofilament Yarn)	
	base fabric	Nonwoven Polyester	backing	PVC and Glass Fiber	
Specification	size	500mm x 500mm	overall thickness	10.0mm	
	pile height	H 7.0mm / M 5.0mm / L 3.0mm (multi cut and loop)			
	gauge	1/8	stitch	10.0	yarn weight (oz/sq.yd)
Packing	16pcs/box = 4m <sup>2</sup> /box				
Net Weight	22.4kg/box				
Performance	Flame-retardant	Fire Defense Law in Japan Authorized No.E0040221			
	Antistatic	Less than 1.0kv (JIS L 1021-16, at 23 degrees centigrade, 25%RH)			
	Formaldehyde Radiation	F☆☆☆☆ Interior-fabrics Performance Evaluation Conference Certified No. J04-30105			
Way of Installation	 Monolithic		or  Quarter Turn		
Recommended Adhesive from TOLI	TOLI ECO GA Cement	(required quantity)	for steel or plastic sub-floor	40 to 60 gram/m <sup>2</sup>	
			for mortar and wood sub-floor	60 to 100 gram/m <sup>2</sup>	
Notes on Installation	Apply the adhesive on the whole surface of the sub-floor thinly and evenly. After drying, when the adhesive becomes translucent, install the tiles. Be careful not to put the tiles too tightly.				
Others	Please note that the product has the indigenous odor from its materials.				

MADE IN JAPAN

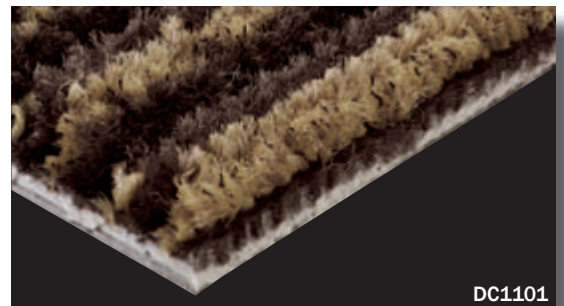

DC1100



▲ DC1101/GX3014 (GX-300 - page 122)



DC1101



DC1104



DC1105